


## 860100xx

Connecting  
cable for Remote  
Electrical Tilt (RET)  
System

### RCU control cable 2 x 8 pin connector

Electrical specifications	
Standard	AISG / IEC60130-9
Connectors	2 x 8 pin IEC60130-9, female/male
Construction	Shielded 3 x 0.75mm <sup>2</sup> + 2 x 0.32mm <sup>2</sup> conductor line, 1 x twisted pair 8.0±0.3mm O.D. (jacket)
Rated Voltage	250VAC
Rated current	5A (power supply) (at 40°C)
Withstanding voltage	1000VAC(r.m.s)
Insulation resistance	100MΩ.km min.
Contact resistance	5mΩ max
Weight	80kg/km (approximately, excluding connectors)
Operating temperature range	-40°C to +85°C
Operating humidity range	0% 95% RH
Waterproof	IP 67 (when mated)

Length	Type nº
0.5 m	86010054
1 m	86010007
2 m	86010008
3 m	86010029
5 m	86010009
10 m	86010010
15 m	86010031
20 m	86010032
25 m	86010011
40 m	86010012
50 m	86010033
60 m	86010013
80 m	86010014
100 m	86010015

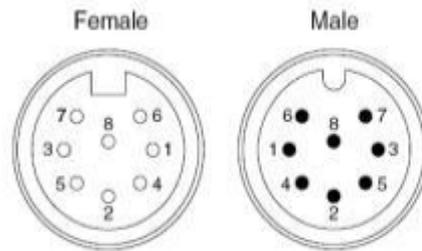

Pin	Signal
1	+12V DC
2	Not connected
3	RS485 B
4	Not connected
5	RS485 A
6	+24V DC
7	DC return
8	Not connected