

7833x004


Triple Band Combiner 703-788 / 791-862 / 880-960

Triple Band Combiner
703-788 / 791-862 / 880-960

Type	78331004 Single Unit	78332004 Double Unit
Frequency (MHz) Band 1 Band 2 Band 3	703-788 791-862 880-960	
Insertion Loss (dB)	Port 1: ≤ 0.5 dB (703-780)/ ≤ 1.0 (780-787)/ ≤ 1.5 (787-788) Port 2: ≤ 1.5 dB (791-792)/ ≤ 1.0 (792-794)/ ≤ 0.5 (794-862) Port 3: ≤ 0.5 (880-960)	
Isolation (dB)	≥ 40	
PIM3 (dBc, @2x43dBm)	≤ -160	
VSWR	≤ 1.25	
Input Impedance (ohm)	50	
Max. Input Power (W)	200 per Port	
ASIG/DC By-pass	Bypass at All Ports	
Connectors	4.3-10 Female	
Dimension (mm)*	TBD	TBD
Weight (kgs)	TBD	TBD
Ingress Protection Class	IP66	
Operational RH (%)	≤ 95	
Operating Temperature (°C)	-40 to +65	
Storage Temperature (°C)	-50 to +85	
Barometric Pressure (kPa)	TBD	
Mounting	Wall Mount or Pole Mount (Pole Size: Ø35-125mm)	

Dimensions

Double unit 78332004

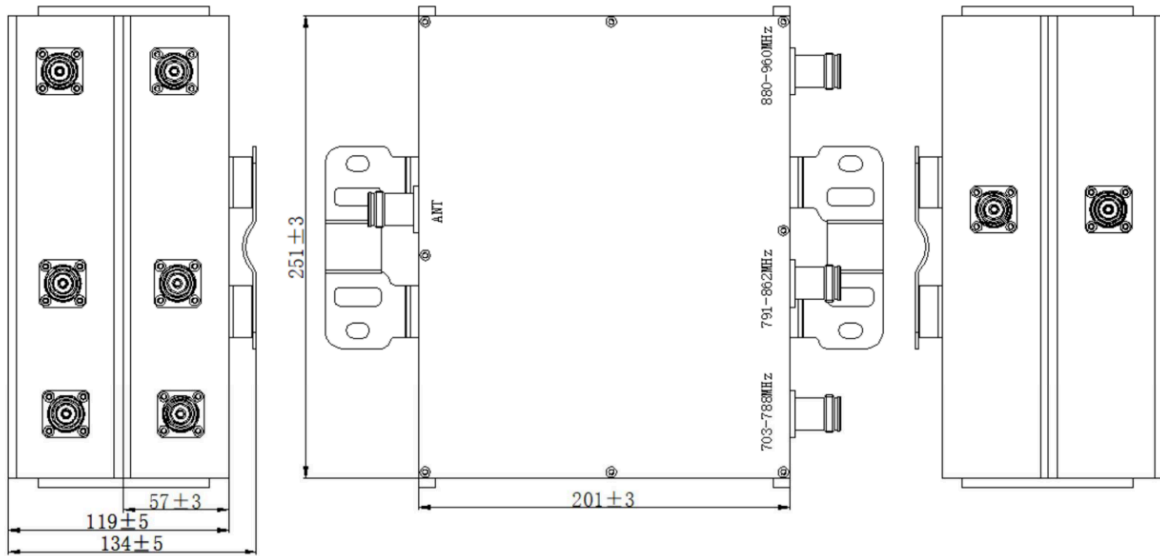

Single unit 78331004

